

SL410 Lens 4K Resolution Day/Night lenses up to 1/1.7" sensors

- ✓ Ultra high resolution for 4K cameras, up to 12.4 megapixel
- ✓ Available in DC auto-iris, P-iris, and manual iris versions
- ✓ Non-motorized version, Fully motorized versions available with combinations with zoom, focus, iris, IR cut, limit switch
- ✓ IR corrected for true Day/Night cameras
- ✓ Compact design to fit into domes as small as 4" mini-dome size
- ✓ CS-mount as well as C-mount
- ✓ Used for sensor sizes 1/2.5", 1/2.3",1/2" 1/1.8", and up to 1/1.7" (Sony IMX178, Sony IMX226 for example)

SL410 lens family specifications

<u> </u>										
Lens	SL410A	SL410P	SL410M	ML410M						
Mount type	CS-mount	CS-mount	CS-mount	C-mount						
Iris type	DC autoiris	P-iris	Manual iris	Manual iris						
Focal length	4-10mm									
Image circle	Ø9.4mm									
Resolution	12.4 megapixel									
F/#	F/1.4 @ 4mm – F/2.4 @ 10mm to close									
Focus Range	0.5m to infinity									
IR Correction	Day/Night									
Lens length	< 64mm TTL									
Weight	69-78g (depending on version)									
Operating temperature	-20C to 60C (<70% humidity, non-condensing)									
Storage temperature	-30C to 70C (<90% humidity, non-condensing)									

Field of view for sensor sizes

I leid of view for serisor sizes									
Sensor size	1/1.7"	1/1.8"	1/1.8" 4K*	1/2"	1/2.3"	1/2.5"			
Horizontal	112° - 44°	110° - 43°	110° - 43°	93° - 37°	90° - 36°	83° - 33°			
Vertical	81° - 33°	71° - 29°	52° - 21°	68° - 28°	67° - 27°	60° - 25°			
Diagonal	149° - 55°	139° - 52°	126° - 48°	120° - 46°	117° - 45°	106° - 42°			

*4K format = 4000 x 2000 pixels

Lens designation

XX410x XX -XX CS: CS mount

D25: smooth Ø25mm mount

TL: motorized SL: non-motorized

ML: non-motorized

A: autoiris
P: P-iris

R3: motorized zoom, focus, iris
R4: motorized zoom, focus, iris, IRC
R5: motorized zoom, focus, iris, with limit

M: manual iris switch for zoom, focus limits

R6: motorized zoom, focus, iris, IRC, with

limit switch for zoom, focus limits

Production versions: (call for other versions)

SL410M (manual lens, manual iris, CS mount)

SL410A (manual lens, DC autoiris, CS mount)

SL410P (manual lens, P-iris, CS mount)


ML410M (manual lens, manual iris, C mount)

TL410A R6-CS (fully motorized, DC autoiris lens)

TL410P R6-CS (fully motorized, P-iris lens)

TL410P R6-25 (fully motorized, P-iris, D25 mount)

Other versions are available by special request and may be added to regular production

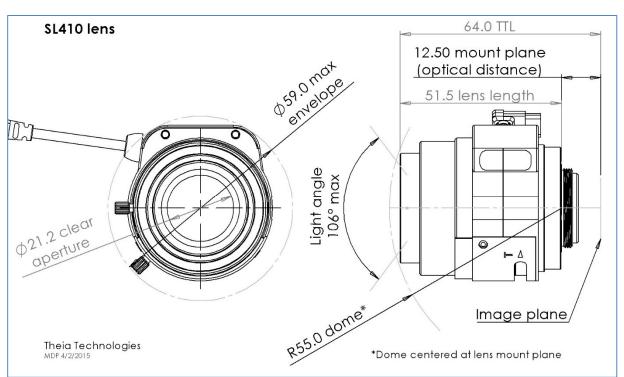

For more information contact Theia Technologies

info@TheiaTech.com www.TheiaTech.com +1-503-570-3296

