

5MP Fisheye Fixed Dome Network Camera

SV-AIPC5M-FE



Key Features

Optics

- Ultra wide angle lens, 360° panoramic image
- Smart IR, Up to 10 m (33ft) IR distance
- 2D/3D DNR (Digital Noise Reduction)

Compression

- Ultra265, H.264, MJPEG
- Built-in omni directional microphone (IPC815SR-DVPP14)
- Triple stream (3 panoramic view)

Network

- ONVIF conformance

Structure


- Support PoE power supply
- Wide temperature range: -40°C to 60°C (-40°F to 140°F)
- Wide voltage range of $\pm 25\%$
- IK10
- IP66

Specifications

Model no.	SV-AIPC5M-FE				
CAMERA					
Image sensor	1/2.8", progressive scan, 5.0 megapixel, CMOS				
Lens	1.4mm@F2.0				
DORI distance	Lens	Detect (m)	Observe (m)	Recognize (m)	Identify (m)
	1.4mm	31.5	12.6	6.3	3.2
Angle of view	360°				
Shutter	Auto/ manual, shutter time: 1~1/100000 s				
Minimum illumination	Colour: 0.01 Lux (F2.0, AGC ON) 0 Lux with IR				
Day/ night	IR-cut filter for day & night function				
Digital noise reduction	2D/3D DNR				
S/N	>55dB				
IR range	UP to 10m (33ft)				
Defog	Digital defog				
WDR	120dB				
VIDEO					
Compression	Ultra265, H.264, MJPEG				
H.264 code profile	Baseline profile, main profile, high profile				
Frame rate	Main stream: (2592×1944): Max.30fps; Sub stream: (1920×1080): Max.30fps; Third stream: D1(720 x 576): Max.30 fps				
BLC	Supported				
OSD	Up to 8 OSDs				
ROI	Up to 8 areas				
Privacy mask	Up to 8 areas				
Motion detection	Up to 4 areas				
General function	Watermark, IP address filtering, tampering alarm, alarm input, alarm output, access policy, ARP protection, RTSP authentication, user authentication				
SMART					
Behavior detection	Motion detection				
motion detection	Moving within a pre-defined virtual region				
Recognition	Audio detection				
Statistical analysis	Heat map				

General function	Watermark, IP address filtering, tampering alarm, alarm input, alarm output, access policy, ARP protection, RTSP authentication, user authentication
AUDIO	
Audio compression	G.711
Two-way audio	Supported
Suppression	Supported
Sampling rate	8 KHZ
STORAGE	
Edge storage	Micro SD, up to 256GB
Network storage	ANR
NETWORK	
Protocols	IPv4, IGMP, ICMP, ARP, TCP, UDP, DHCP, PPPoE, RTP, RTSP, RTCP, DNS, DDNS, NTP, FTP, UPnP, HTTP, HTTPS, SMTP, 802.1x, SNMP, QoS
Compatible integration	ONVIF (Profile S, Profile G, Profile T), API
LIVE VIEW DISPLAY	
Mount type	Support table, wall, and ceiling
INTERFACE	
Audio I/O	Input: impedance 35 k Ω ; amplitude 2 V [p-p]
	Output: impedance 600 Ω ; amplitude 2 V [p-p]
Alarm I/O	1/1
Built-in mic	Supported
Video output	1 BNC, impedance 75 Ω ; amplitude 1 V [p-p]
Network	1 RJ45 10M/100M Base-TX Auto-adaptive Ethernet
GENERAL	
Power	DC12V \pm 25%, PoE (IEEE 802.3af)
	Power consumption: Max. 8.9 W
Dimensions (Φ \times H)	Φ 125 \times 43.7 mm (Φ 4.9" \times 1.7")
Weight	0.39kg (0.86lb)
Working environment	-40°C~60°C (-40°F~140°F), Humidity: \leq 95% RH
Ingress protection	IP66
Vandal resistant	IK10
Reset button	Supported

Dimensions

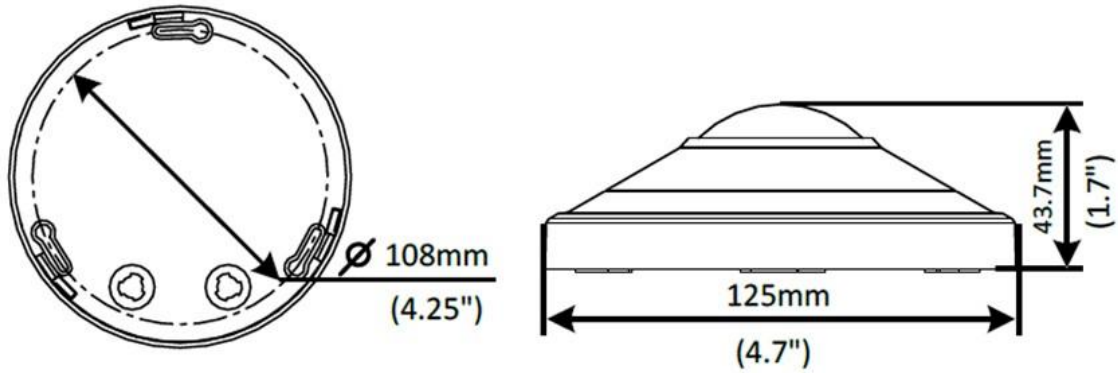

ScanViS Limited

611 East Wing, No.8 Science Park West Avenue, Hong Kong Science Park, Tai Po, Hong Kong

sales@scanvis-ai.com | www.scanvis-ai.com

©2019 ScanViS Ltd. All rights reserved. *Product specifications and availability are subject to change without notice.