


P6900-IW-V2

Bt PoE ANPR Camera Housing

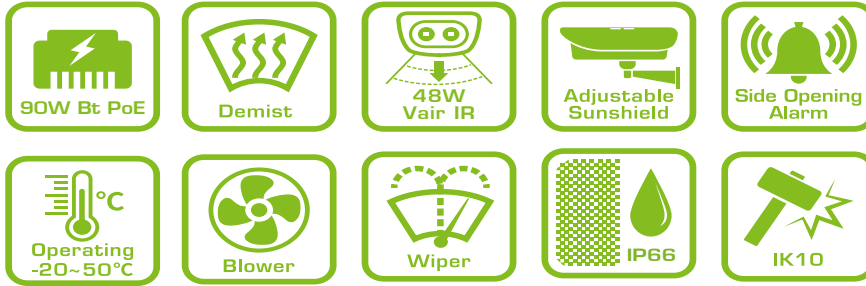



A safety city depending on ANPR implementation is becoming increasingly important. AETEK provides a series of all-in-one capacious ANPR camera housing fitting most of today's box/fixed cameras even equipped with 8-80mm varifocal lens. The camera housing is constructed from aluminum die casting to meet IP66/IK10 standards. These professional models are equipped with heater, blower, wiper, and built-in snapped in 48W IR LEDs specially using VAIR-IR technology to cover 2-lane ANPR detection. Besides elegant mechanical design, IR illuminator is snapped in camera housing directly to conceal RS-485 & power cables.

The ANPR camera housing has models supported by PoE individually. P6900-IW-V2 is a Bt PoE model supported by 90W PSE over one Ethernet cable.


Features

VAIR LEDds Technology

VAIR technology is an optical technology to adjust illuminator beam angle by remote control thru RS485 Pelco-D command or manual dip switch to suit diversified camera FOV.

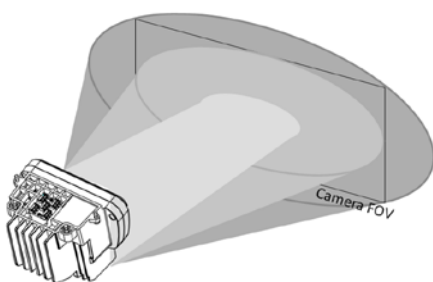

Wide angle for short distance



Tele angle for long distance



AXIS Q1635 equipped with 8-80mm varifocal lens




Avigilon 8.0-H4A-B2 IP Camera

Specifications




P6900-IW-V2 Kit A	
IR Illuminator Specifications	
IR lights catch vehicle speed	MAX: 100km/h (62MPH)
IR lights cover FOV	2 Lanes
VAIR light beam angle	10° ~ 30°
Adjustable angle way	<ul style="list-style-type: none"> Manual DIP Remote control by Pelco D via RS485
IR light sensor sensitivity	Pelco D via RS485
Power consumption	48W
Power input	DC24V
Camera Housing Specifications	
Window heater	V
Blower	V
Wiper	V
Weather rating	IP66
Power input	90W Bt PoE
Power output	DC24V,PoE
Power consumption	72W
Vandal proof	IK10
Operating temperature	-20°C ~ +50°C (-4°F~122°F)
Optional add-on heater Operating temperature	N/A

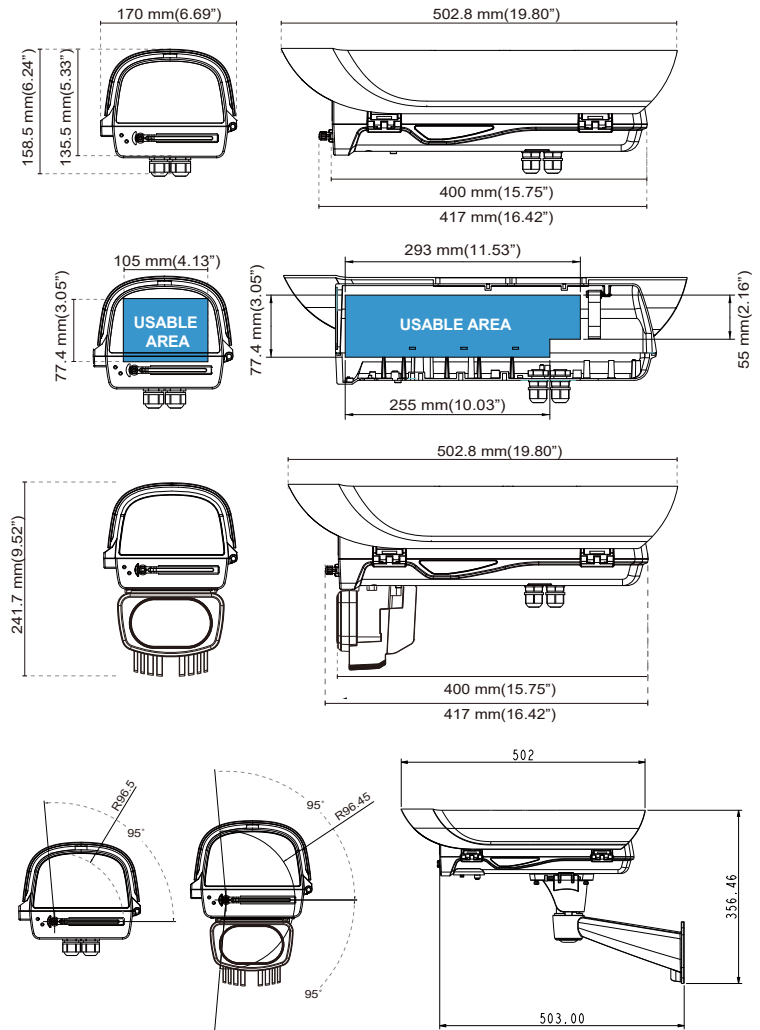Dimensions



Accessories



PoE Injector

Indoor PoE Injector	Outdoor PoE Injector	Outdoor PoE Injector / Junction Box
 <p>I39-210</p> <ul style="list-style-type: none"> 1xGbE 90W Bt PoE 100~240VAC 	 <p>I49-210</p> <ul style="list-style-type: none"> 1xGbE 90W Bt PoE 100~240VAC IP67/IK10 -40°C ~ 60°C 	 <p>I49-211</p> <ul style="list-style-type: none"> 1xGbE 90W Bt PoE 100~240VAC IP67/IK10 -40°C ~ 60°C

Industrial PoE Switch

PoE Switches
 <p>H30-044-91</p> <ul style="list-style-type: none"> 4xGbE Bt PoE + 2xGbE SFP + 2xGbE RJ45

Mount Brackets

Pole Mount	Corner Mount
 <p>AT-100 Pole Mount Adapter</p>	 <p>AT-200 Corner Mount Adapter</p>